



REC'D 24 NOV 2003

WIPO PCT

**Prioritätsbescheinigung über die Einreichung
einer Patentanmeldung**

Aktenzeichen: 102 44 914.7

Anmeldetag: 25. September 2002

Anmelder/Inhaber: Gesellschaft für Schwerionenforschung mbH,
Darmstadt/DE

Bezeichnung: Nanodevice for charged particle flow and method
for producing same

IPC: „noch nicht festgelegt“

Die angehefteten Stücke sind eine richtige und genaue Wiedergabe der ursprünglichen Unterlagen dieser Patentanmeldung.

München, den 23. Oktober 2003
Deutsches Patent- und Markenamt
Der Präsident
Im Auftrag

Werner

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

September 25, 2002

Our ref.: 13369
New German Patent Application
Gesellschaft für Schwerionenforschung mbH

Nanodevice for charged particle flow and method for producing same.

Description

The present invention relates to a apparatus having a nano-device for controlling the flow of charged particles in electrolytes and method for producing same.

In many electrolytic systems the problem of controlling ion flow, rather than flow of electrons, is crucial. For the flow of electrons diodes and transistors are the basic elements controlling, switching on and off and amplifying the signal. For the ionic current there exist very limited possibilities to tune the ion flow. From German patent application 100 44 565.9 an electrochemical rectifier is known, based on preparation of asymmetric pores in a polymeric foil. One mode of operation entails applying a constant voltage across a membrane with asymmetric pores, however changing the current would require changing the concentration and/or the pH-value of the electrolyte. Since this changing of concentration and/or pH-value is time consuming and disturbs the condition

of operation, this option may not be applicable for a given system.

Therefore, it is the object of the present invention to provide an independent "switch", which would be able to modulate the ion current through the pore with a minimum disturbance of the operation conditions. Further, it is an object of the present invention to control the transport of charged or ionized large molecules.

According to the invention an apparatus having a nanodevice for controlling the flow of charged particles in electrolytes is provided, comprising an electrolytic bath container, divided by a polymeric foil into a first and a second compartment. Each compartment comprises an electrode connected to a voltage supply. Further, the nanodevice comprises at least an asymmetric pore forming a via hole through said foil, wherein said pore provides a narrow opening of a diameter in the range of several nanometers down to about one nanometer on a front side of said foil and a wide opening in the range of several ten nanometers up to several hundred nanometers on a back side of said foil.

The polymeric foil is covered on its front side by an electrically conductive layer surrounding said narrow opening. A gate voltage supply is connected to said electrically conductive layer on said front side of said foil controlling the flow of charged particle within said nanodevice from said first compartment to said second compartment and vice versa.

This nanodevice has the advantage to control or to switch on and off a charged particle flow of heavy ions, ions of macromolecules, ions of bio-molecules, ionized dimeric,

ionized oligomeric or ionized polymeric DNA or ionized insulin. In such a nanodevice with such a pore the spatial distribution of electric potential inside the pore is changed by the gate voltage on the electrically conductive layer of the polymeric foil in order to advantageously tune the flow of ion through the pore. The electrically conductive layer forms a gate close to the narrow opening of the conical, funnel-like, or trumpet-like pore, where the pore has its highest resistance. Such a gating ion flow would allow to control ionic current through the asymmetric pore.

In a preferred embodiment the polymeric foil comprises polyethylene terephthalate, polyimide or polycarbonate. These materials have the advantage, that an ion trace can be performed through said foil by a high accelerated ion like bismuth. Such a trace across a foil material can be etched in an electrolytic cell consisting of two cell halves filled with an electrolytic solution and being divided by said foil comprising said ion trace. These materials have further the advantage that a nanodevice made of same is cation selective.

Another preferred embodiment comprises a gold layer as electrically conductive layer surrounding said narrow opening of said front side. Such a gold layer as a gate electrode has the advantage, that it is resistive against corrosion and oxidation. Therefore, such gold layer can be used in different electrolytic bathes to control and/or switch on an off a flow of charged particles.

Another preferred material for the gate electrode is a semiconductor like indium oxide or ITO. Indium oxide has the advantage, that it is erosion and oxidation resistant in almost any electrolytic bath.

In a further preferred embodiment the back side of said foil is covered by an electrically conductive layer surrounding said wide opening. Such a second metal layer on the back side of the polymeric foil enables the nanodevice to make the ion current changes finer and better controlled.

The nanodevice is not limited either to polymer films or to a gold layer, since any asymmetric and charged nanopores together with a conductive layer, which can be charged by a voltage, can be potentially used to accomplish the present invention.

One preferred mode of operation of the nanodevice is to provide a direct current voltage supply for the electrolytic bath and a direct current voltage supply for the gate voltage. Another preferred mode of operation is to apply an alternating voltage to the gate, which enables to achieve a pulse-like flow of charged molecules through said nanodivice with at least one asymmetric pore.

Preferred applications of the apparatus having a nanodevice are

1. Separation processes for the pharmaceutical industry,
2. Controlled release of bio-molecules like insulin,
3. Voltage-controlled nanosystems,
4. Tuning of the ion current signal,
5. Gating of ionic bio-molecule in microfluidic lab-on-a-chip devices.

The invention is further related to a method for producing a nanodevice. Such a method comprises the steps of:

- irradiating a membrane of a polymeric foil by at least one high accelerated ion to form an ion trace through said foil;
- etching said ion trace from a back side of said foil toward a front side of said foil to form a pore having a wide opening on said back side in the range several ten nanometers up to several hundred nanometers and a narrow opening on said front side in the range of several nanometers down to about one nanometer;
- drying said etched foil;
- depositing an electrically conductive layer on said front side by diminishing the narrow opening;
- reopen said narrow opening to a predetermined diameter by etching said conductive layer from its back side.

This method has the advantage that a conical, a funnel-like or a trumpet-like nanopore is performed along the ion trace through the polymeric foil dependent on the parameters of an electrolytic process in an electrolytic cell consisting of two cell halves filled with an electrolytic solution.

In a preferred method at least a single bismuth ion is accelerated to an energy in the range of 10 to 15 MeV and irradiated toward said polymeric foil to form said ion trace. This bismuth ion is particularly advantageous if applied to foils made of polyethylene terephthalate, polyimide and/or polycarbonate. This trace is preferably etched by a caustic solution, where such a solution can comprise 9m NaOH. This caustic solution has the advantage that the ion trace can be etched at room temperature. After etching along the ion trace an asymmetric pore, the front side of the foil is deposited with a electrically conductive layer like a gold or indium oxide layer by a sputter technique.

To increase the adhesiveness of an electrically conductive layer like a gold layer or a semiconductor layer on the polymer surface of the foil, it is an advantage to roughen the surface of the polymer foil before etching the irradiated film.

During said deposition of a metal or a semiconductor on said front side the narrow opening is diminished. To reopen said narrow opening a piece of a conductive tape is attached to cover the conductive layer. After that it is an advantage to reinsert said foil with its electrically conductive layer and said piece of a conductive tape in an electrolytic cell, wherein the two cell halves are filled with potassium fluoride, whilst a conductive tape stays attached to the conductive layer.

Further embodiments, features and advantages of the invention are now discussed with reference to the attached drawings.

Fig. 1 shows a schematic drawing of an apparatus having a nanodevice for controlling the flow of charged particles in electrolytes.

Fig. 2 shows principles of the functioning of the nanodevice for controlling the flow of charged particles in electrolytes.

Fig. 3 shows a scheme of an experimental set-up for evaluating the performance of the nanodevice.

Fig. 4 shows current-voltage characteristics of a single conical pore in a polyethylene terephthalate (PET) foil with a gold layer on the side of the small or

narrow opening of a pore, applying 0.1m KF on both sides of the membrane foil.

Fig. 5a,b show examples of time series without and with applied "gate voltage" for two directions of the potassium ion flow.

Figure 1 shows an embodiment of an apparatus having a nanodevice 1 for controlling the flow of charged particles (ion^+ or ion^-) in an electrolyte. This device comprises an electrolytic bath container 2 divided by a polymeric foil 3 into a first 4 and a second 5 compartment. Each compartment 4 and 5 comprises an electrode 6 and 7 connected to a voltage supply 8, which supplies in this embodiment a direct current voltage U_1 . The electrolytic current I is measured by a current meter 18.

If the potential of electrode 6 is positive, positive charged particles like ion^+ are forced through the asymmetric pore 9 of the foil 3 from a wide opening 12 on the back side 13 of the foil 3 to a narrow or small opening 10 on the front side of said foil 3. The foil itself is a circular disc having a diameter D of about 30 mm and a thickness d of 12 μm . The material of the foil in this embodiment is polyethylene terephthalate which was irradiated in its center with a single bismuth ion of 11.4 MeV specific energy and etched from one side in a 9m NaOH at room temperature to form said pore 9.

The polymeric foil 3 is covered on the front side 11 by a gold layer surrounding the narrow opening 10 of said pore 9. This gold layer functions as a gate electrode 17, which is supplied by a gate voltage U_2 supply 15. If this gate voltage U_2 is negative, the charged particles in the first compartment 4

like ion^+ are accelerated, so that the flow through the nanodivice 1 is increased toward the second compartment 5. When Increasing U_2 toward a positive gate voltage the flow of positive charged particles (ion^+) is decreased and can even be switched off.

Figure 2 shows principles of the functioning of the nanodevice 1 for controlling the flow of charged particles (ion^+ , ion^-) in electrolytes. Components with the same functions as in Figure 1 are characterized by the same reference signs and an explanation of same is omitted.

Figure 2 shows in detail the principles of operating a device shown in Figure 1. A thin layer 14 of metal or semiconductor is sputtered on the front side 11 of the foil 3 having such narrow openings 10. This layer 14 can be charged via an independent electric circuit U_2 . If the pore is very narrow, the passage of the ions through the pore will be influenced by such a "gate". The pore produced by a track-etching technique in a foil 3 made of polyethylene terephthalate, polyimide or polycarbonate are negatively charged due to formation of carboxylate groups, therefore they are cation-selective. This means that cations are the main charged carriers.

Applying a positive voltage U_2 slows down the flow of cations observed as lower current. Applying a negative voltage U_2 has an opposite effect, the current will be larger. Accordingly, this device will be the first device, which can control the ion flow, based on asymmetry of electric potential introduced by the conical, funnel-like or trumpet-like shape of a charged nanopore in combination with applying locally electric fields. Since this layer can be charged positively or negatively by means of the voltage applied via an independent circuit, this

results in changes of the profile of the electric potential at the pore constriction, which influences the ion current flow.

Figure 3 shows a scheme of an experimental set-up of evaluating the performance of the nanodevice 1. Components having the same functions as in Figure 1 or in Figure 2 are characterized by the same reference signs and an explanation of same is omitted.

The evaluation of the performance of the nanodevice 1 is made for a single pore within a 12 μm thick circular disc of 30 mm diameter. For the purpose of etching such a pore in a 9m NaOH this disc or membrane is inserted in an electrolytic cell consisting of two cell halves of KF and sealed hermetically by applying pressure onto the two cell halves. When the etching process is completed, the polymer foil 3 is removed from the cell and dried. In a next step, a gold layer 14 is sputtered on the front side 11 with its narrow opening 10. Then, a piece of a conductive tape is attached to the front side onto the gold layer. Now, the foil is inserted back into the electrolytic cell, which chambers are now filled with potassium fluoride.

The current through the pore 9 is measured with electrodes of Ag/AgCl. An independent circuit is built, which applies a voltage to the gold layer via the conductive tape. The scheme of the experimental set-up is shown in Figure 3. The use of fluoride ions in a KF solution increases the effect of the applied voltage during the electrolytic procedure. Actually, it is possible to perform this treatment of the device in any electrolyte etching a gold layer.

Figure 4 shows a current-voltage characteristic of a single conical pore 9 in a PET-foil. The abscissa of said diagram shows the voltage U_1 in V and the ordinate shows the current in nA. The dotted curves shows the effect of the parameters: +0.6 V at the metal gate electrode, 0V at the metal gate and -0.6 V at the metal gate. As one can see from this evaluation it is possible to enhance the current through the asymmetric pore at a voltage U_1 of 0.4 V by a gate voltage U_2 of -0.6 V up to around 1 nA, whilst with a positive gate voltage of 0.6 V the ionic current is decreased to 0 or shut off.

Figures 5a and 5b show examples of time series without and with applying a gate voltage for two directions of the potassium ion flow. If a voltage of +2V is applied across the membrane a voltage of +1.5V at the gate will decrease the current drastically, whilst a gate voltage of -1.5 will increase the current up to 1nA. In these diagrams of Figures 5a and 5b the abscissa shows the time in seconds and one can see that after three seconds the current is relatively constant.

In Figure 5b the voltage across the membrane or across the pore is changed to -2V, so that the current is also negative. By applying negative gate voltage of about -1.5V the current is decreased, whilst applying a positive gate voltage of 1.5V the current is increased to -1nA. This diagrams show that this nanodevice is quite sensitive and works like a transistor for ions in an electrolytic bath.

List of reference signs

- 1 nanodevice
- 2 electrolytic bath container
- 3 polymeric foil
- 4 first compartment
- 5 second compartment
- 6 electrode
- 7 electrode
- 8 voltage (U_1) supply
- 9 asymmetric pore
- 10 narrow opening
- 11 front side
- 12 wide opening
- 13 back side
- 14 electrically conductive layer
- 15 gate voltage (U_2) supply.
- 16 electrode
- 17 gate electrode
- 18 current meter

Claims

1. An apparatus having a nanodevice for charged particles flow comprising
 - an electrolytic bath container (2), divided by a polymeric foil (3) into a first (4) and a second (5) compartment, wherein each compartment (4, 5) comprises an electrode (6, 7) connected to a direct current voltage (U_1) supply (8);
 - at least one asymmetric pore (9) forming a via hole through said foil (3), wherein said pore (9) provides
 - a narrow opening (10) of a diameter in the range of several nanometers down to about one nanometer on a front side (11) of said foil (3) and
 - a wide opening (12) in the range of several ten nanometers up to several hundred nanometers on a back side (13) of said foil (3);
 - an electrically conductive layer (14) surrounding said narrow opening (10) on said front side (11);
 - a gate voltage (U_2) supply (15) connected to said electrically conductive layer (14) on said front side (11) of said foil (3) controlling the flow of charged particles within said nanodevice (1) from said first compartment (4) to said second compartment (5) and vice versa.
2. The apparatus according to claim 1, characterized in that said asymmetric pore (9) is a conical pore.
3. The apparatus according to claim 1, characterized in that said asymmetric pore (9) is a funnel-like pore from said wide opening (12) toward said narrow opening (10).

4. The apparatus according to claim 1 or claim , characterized in that said asymmetric pore (9) is a straight trumpet-like pore from said narrow opening (10) toward said wide opening (12).
5. The apparatus according to any one of claims 1 to 4, characterized in that said foil (3) comprises polyethylene terephthalate.
6. The apparatus according to any one of claims 1 to 4, characterized in that said foil (3) comprises polyimide.
7. The apparatus according to claim 1, characterized in that said foil (3) comprises polycarbonate.
8. The apparatus according to any one of claims 1 to 7, characterized in that said nanodevice (1) is cation selective.
9. The apparatus according to any one of claims 1 to 8, characterized in that said electrically conductive layer (14) surrounding said narrow opening (10) on said front side (11) comprises gold.
10. The apparatus according to any one of claims 1 to 8, characterized in that said electrically conductive layer (14) surrounding said narrow opening (10) on said front side (11) comprises indium oxide.
11. The apparatus according to any one of claims 1 to 10, characterized in that said electrically conductive layer (14) surrounding said narrow opening (10) on said front side (11) is a gate electrode (17).

12. The apparatus according to any one of claims 1 to 11, characterized in that said back side (13) of said foil (3) is covered by an electrically conductive layer (14) surrounding said wide opening (12).
13. The apparatus according to any one of claims 1 to 12, characterized in that said nanodevice (1) is applied to control or to switch on and off a charged particle flow of heavy ions, ions of macromolecules, ions of biomolecules, ionized dimeric, ionized oligomeric or ionized polymeric DNA or ionized insulin.
14. A method for producing a nanodevice (1) of an apparatus according to one of the claims 1 to 13 comprising the steps of:
 - irradiating a membrane of a polymeric foil (3) by at least one highly accelerated ion to form an ion trace through said foil;
 - etching said ion trace from a back side (13) of said foil (3) toward a front side (11) of said foil (3) to form a pore having a wide opening (12) on said back side (13) and a narrow opening (10) on said front side (11) in the range of several nanometer down to about one nanometer,
 - drying said etched foil (3);
 - depositing an electrically conductive layer (14) on said front side (11) by diminishing the narrow opening (10);
 - reopen said narrow opening (10) to a predetermined diameter by etching said conductive layer (14) from its back side (13).

15. The method according to claim 14, wherein a single bismuth ion is accelerated to an energy in the range of 10 to 15 MeV and irradiated toward said polymeric foil (3) to form said ion trace.
16. The method according to claim 14 ore claim 15, wherein said ion trace is etched by a caustic solution.
17. The method according to claim 16, wherein said caustic solution comprises 9m NaOH.
18. The method according to one of the claims 14 to 17, wherein said ion trace is etched at room temperature.
19. The method according to one of the claims 14 to 18, wherein said deposition is carried out by sputtering a metal or a semiconductor on to said front side (11).
20. The method according to one of the claims 14 to 19, wherein said front side (11) of said foil (3) is roughened before etching said ion trace.
21. The method according to one of the claims 14 to 20, wherein said membrane is inserted in an electrolytic cell consisting of two cell halves filled with a KF solution and being divided by said membrane and sealed hermetically to etch said ion trace.
22. The method according to one of the claims 14 to 21, wherein a conductive tape is attached to the conductive layer (14) before said reopening of said narrow opening (10) is performed.

23. The method according to claim 22, wherein said foil covered on its front side (11) by a conductive tape is reentered to said electrolytic cell, which cell halves are now filled with NaF.


Abstract

The present invention relates to an apparatus having a nanodevice (1) for controlling the flow of charged particles in an electrolyte. Such apparatus comprises an electrolytic bath container (2) divided by a polymeric foil (3) into a first (4) and a second compartment (5), wherein each compartment (4, 5) comprises an electrode (6, 7) connected to a voltage supply (8). Further the apparatus comprises at least one asymmetric pore (9) forming a via hole through said foil (3), wherein said pore (9) provides a narrow opening (10) of a diameter in the range of several nanometers down to about one nanometer on a front side (11) of said foil (3) and a wide opening (12) in the range of several ten nanometers up to several hundred nanometers on a back side (13) of said foil (3). Further, the apparatus comprises an electrically conductive layer (14) surrounding said narrow opening (10) on said front side (11) and a gate voltage supply (15) connected to said electrically conductive layer (14) on said front side (11) of said foil (3) controlling the flow of charged particles within said nanodevice (1) from said first compartment (4) to said second compartment (5) vice versa. The invention further relates to a method for producing such a nanodevice (1).

[Figur 1]

FIG 2

2/3

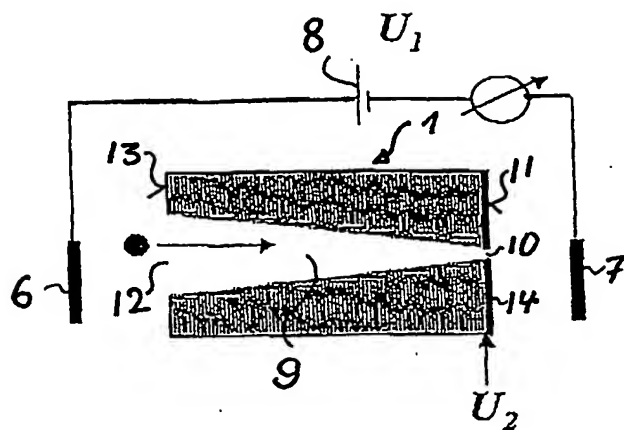

- 1) $U_2 = 0$ I
- 2) $U_2 > 0$ $I - \Delta I$
- 3) $U_2 < 0$ $I + \Delta I$

FIG 3

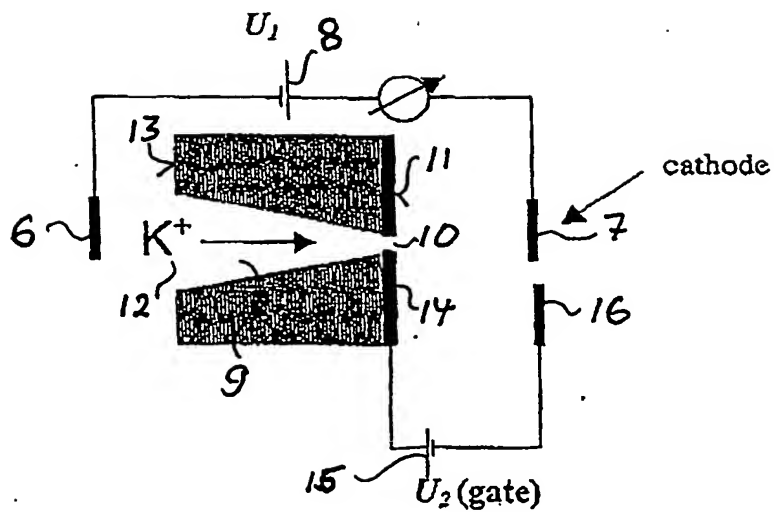


FIG 4

3/3

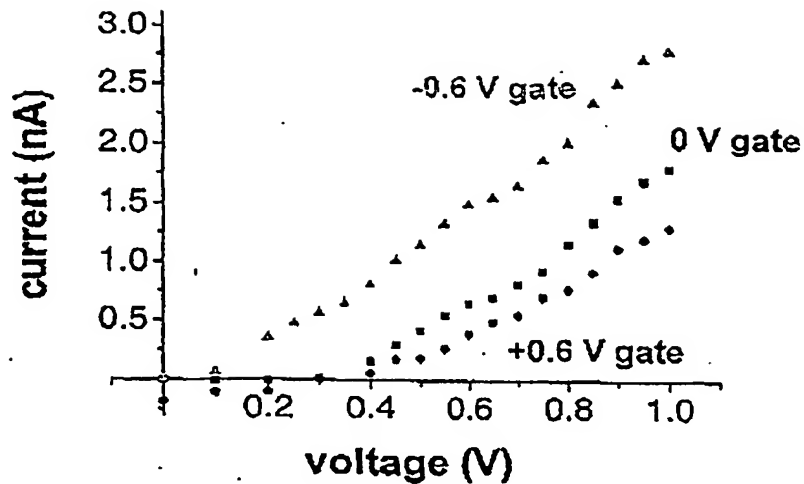


FIG 5a

+2 V applied across the membrane


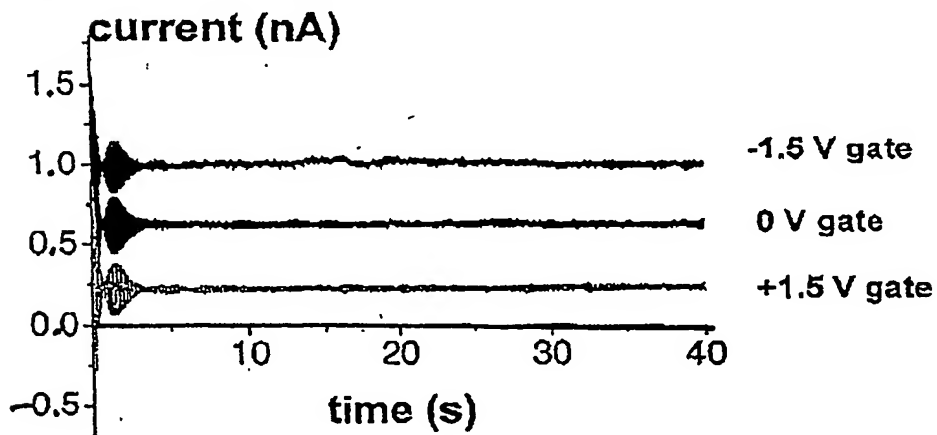


FIG 5b

-2 V applied across the membrane

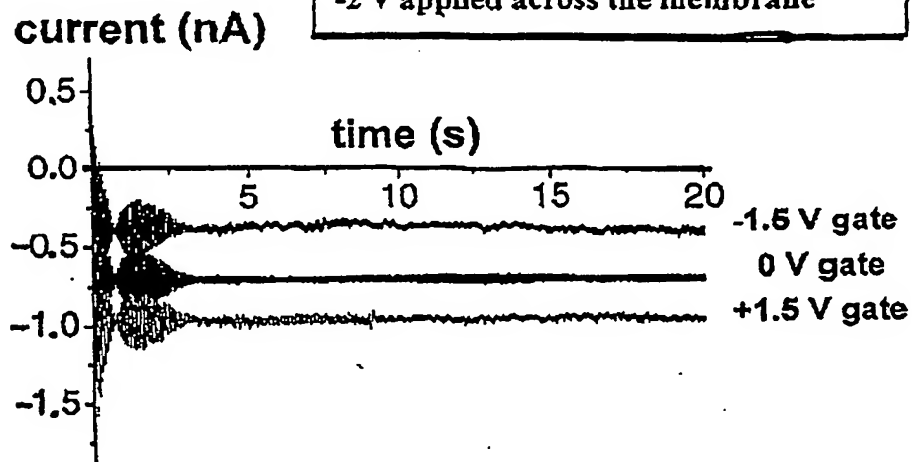

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.